

SUBMITTAL DATA SHEET

Series Name: Electric Heater
Model Number: EAH-20E(UL)




Heater

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____


SPECS

Code	22013201000043	
Model	EAH-20E(UL)	
Normal Operational		
Voltage	(V, Ph, Hz)	208 / 230, 1, 60
Current	A	72.1 / 80
Heat Power	kW	15 / 18.4
MCA(Circuit 1)	A	46 / 53
MAX. FUSE(Circuit 1)	A	50 / 60
MCA(Circuit 2)	A	46 / 53
MAX. FUSE(Circuit 2)	A	50 / 60
Heater dimension		
mm		535 x 258 x 204
inch		21-1/8 x 10-1/8 x 8
Pakcaging dimension		
mm		610 x 365 x 260
inch		24 x 14-3/8 x 10-1/4
Net Weight		
kg		4.6
lbs		9.3
Gross Weight		
kg		7.1
lbs		15.7

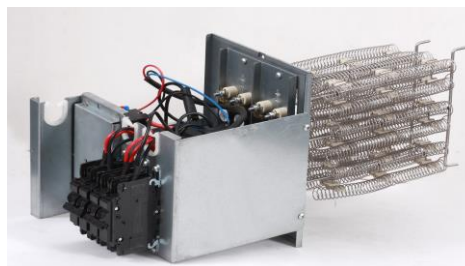

Heater dimension

unit: Inch (mm)

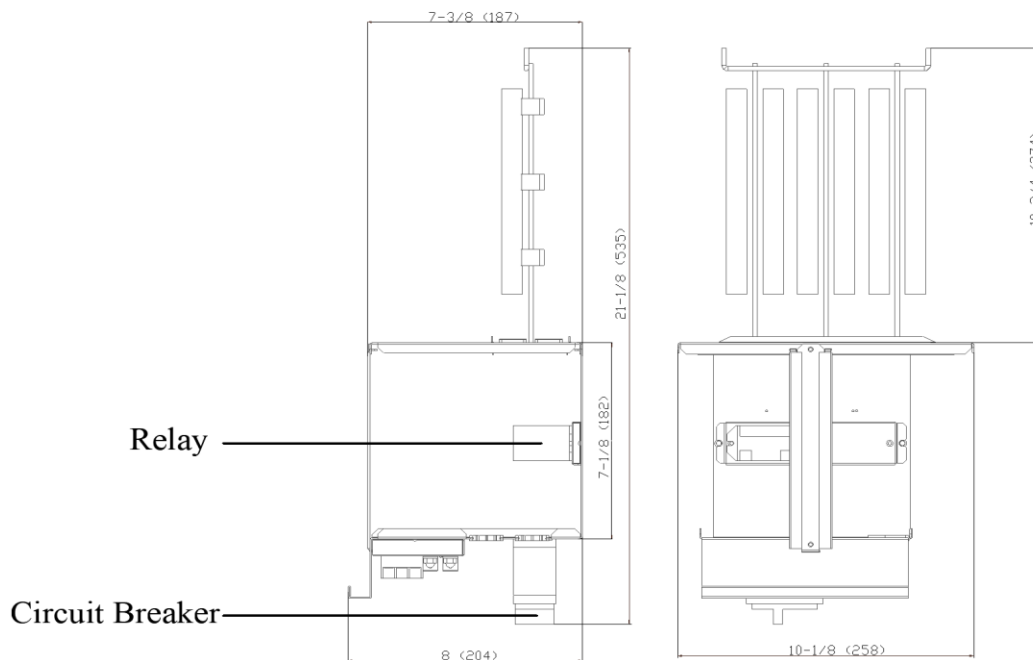


Wiring diagram

20KW HEAT KIT

 :THERMAL LINK

 :THERMAL CUT-OUT, SELF-RESETTING

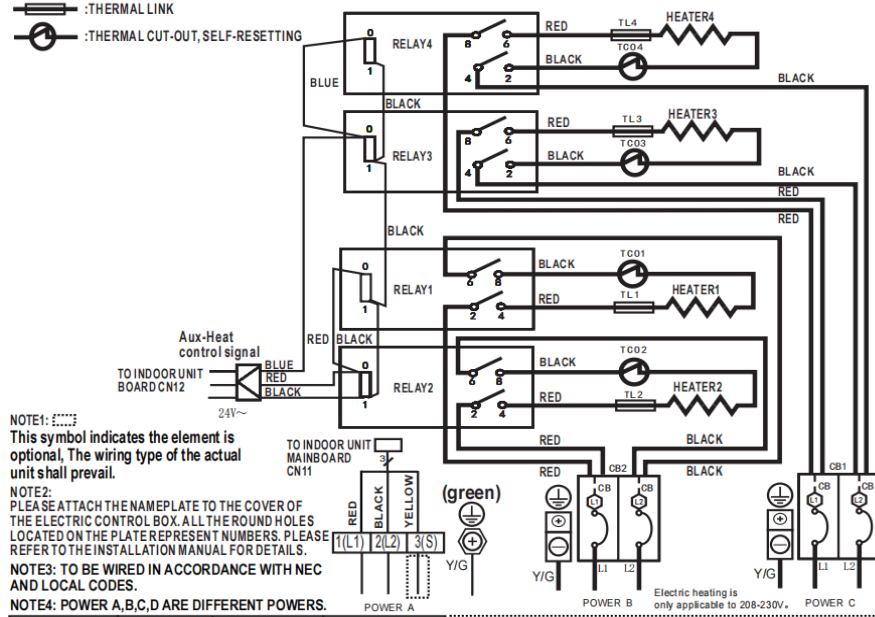

The wiring mode of power supply A shall be based on the type of original wiring terminal of AHU; for type A, S position must be connected to the outdoor S; for type B, S position shall not be connected. When using 115VAC, connect L1 and L2 (L2 is used as N).



North American HVAC Products Ltd.

Add.: #100 5118 N Fraser Wy, Burnaby, BC V5J 0H1

Tel: 604-430-8496 info@nahvac.com www.nahvac.com

Midea reserves the right to change the specifications of the product, and to withdraw or replace products without prior notification or public announcement.
Midea is constantly developing and improving its products.