

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: EVOX Multi-Position Air Handler Extreme Heat Series
Model Number: MAUHE-H60B-2A/MO1HE-H60B-2A

Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

ESP (in.W.C.)	0-0.8	
Indoor Air Flow (Turbo/H/ML/SI) (CFM)	1,807 / 1,583 / 1,360 / 1,136 / 1,136	
Indoor Noise Level (Turbo/H/ML/SI) (dBA)	54.5 / 52 / 49.5 / 34.5 / 34.5	
Dimension (WxDxH)	inch	24-1/2 x 21 x 53
	mm	622 x 534 x 1,346
Package (WxDxH)	inch	27-3/8 x 27-3/4 x 56-1/2
	mm	695 x 705 x 1,435
Net/Gross Weight	lbs	163 / 191
	kg	73.9 / 86.6

OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY	
Compressor Model	ETPQ480D66UMU1	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	1,300	
Refrigerant Oil	VG75	
Outdoor Air Flow (Max) (CFM)	2,649	
Dimension (WxDxH)	inch	37-1/2 x 16-3/8 x 52-1/2
	mm	952 x 416 x 1,333
Package (WxDxH)	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1,095 x 495 x 1,480
Net/Gross Weight	lbs	243 / 275
	kg	110.2 / 124.8

EFFICIENCY

Cooling		Heating	
SEER2	16.0	HSPF2-4	9.0
EER2	10.0	COP	3.10

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	54,000
Min/Max Capacity	11,400 ~ 56,300
Moisture Removal(L/h)	5.87
Standard Operating Range(*F/*C)	-22~122 (-30 ~ 50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	56,000
2. @ 47°F Min/Max Capacity	8,100 ~ 64,500
3. @ 17°F Rated	45,000
4. @ 5°F Rated: Capacity / COP	52,000/1.8
5. @ 5°F Max: Capacity	52,000
Standard Operating Range(*F/*C)	-22~75 (-30 ~ 24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL



Indoor Power Supply	115/208/230V,60Hz,1Ph	
Indoor MCA 115V/(208/230V)	14.5/11.0	
Indoor MOP	15.0	
Outdoor Power Supply	208/230V,60Hz,1Ph	
Outdoor MCA	40.0	
Outdoor MOP	40.0	
Communication Wiring	AWG 20/2	
Compressor RLA	31.0	
Outdoor Fan Motor RLA	2.4	
Outdoor Fan Motor W	85	
Indoor Fan Motor RLA	8.3	
Indoor Fan Motor W	750	
System Power Input @ Cooling (W)	5,400 (1,530 ~ 6,430)	
System Power Input @ Heating (W)	5,290 (730 ~ 5,960)	
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)	
RLA: Rated load amps (A)	W: Fan motor rated output (W)	

PIPING

Throttle type(Indoor)	EXV
Throttle type(Outdoor)	EXV
Liquid Size	3/8" (9.52mm)
Gas Size	3/4" (19mm)
Max. Piping Length(ft/m)	246 (75)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	183 (5.2)
Additional Charge of Refrigerant(oz/ft)/(g/m)	0.7 (65)
Connection Method	Flared


Indoor Unit Dimension

Unit:inch(mm)

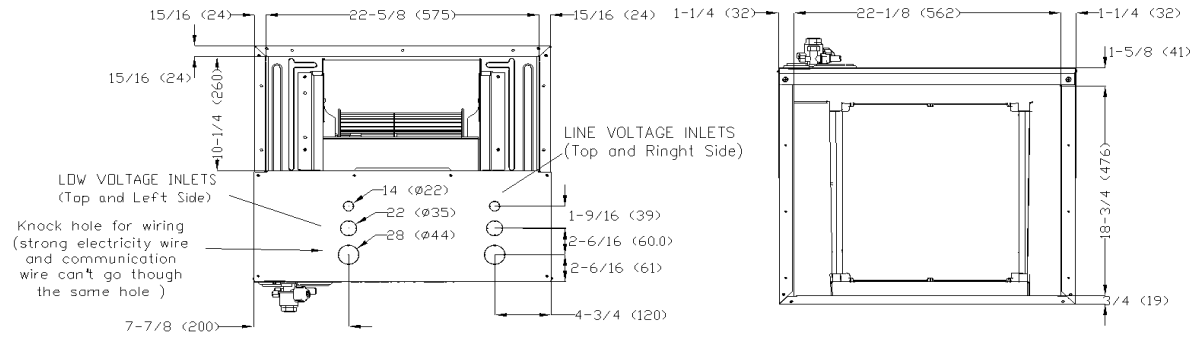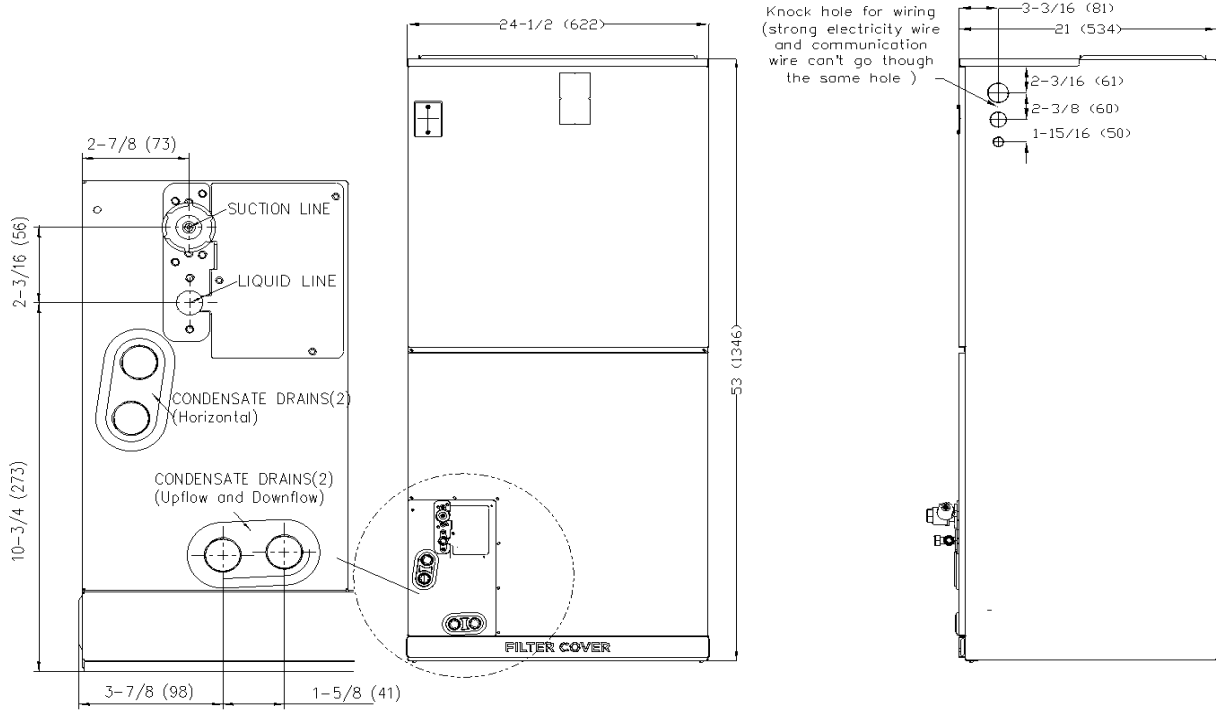


Outdoor Unit Dimension


Unit:inch(mm)

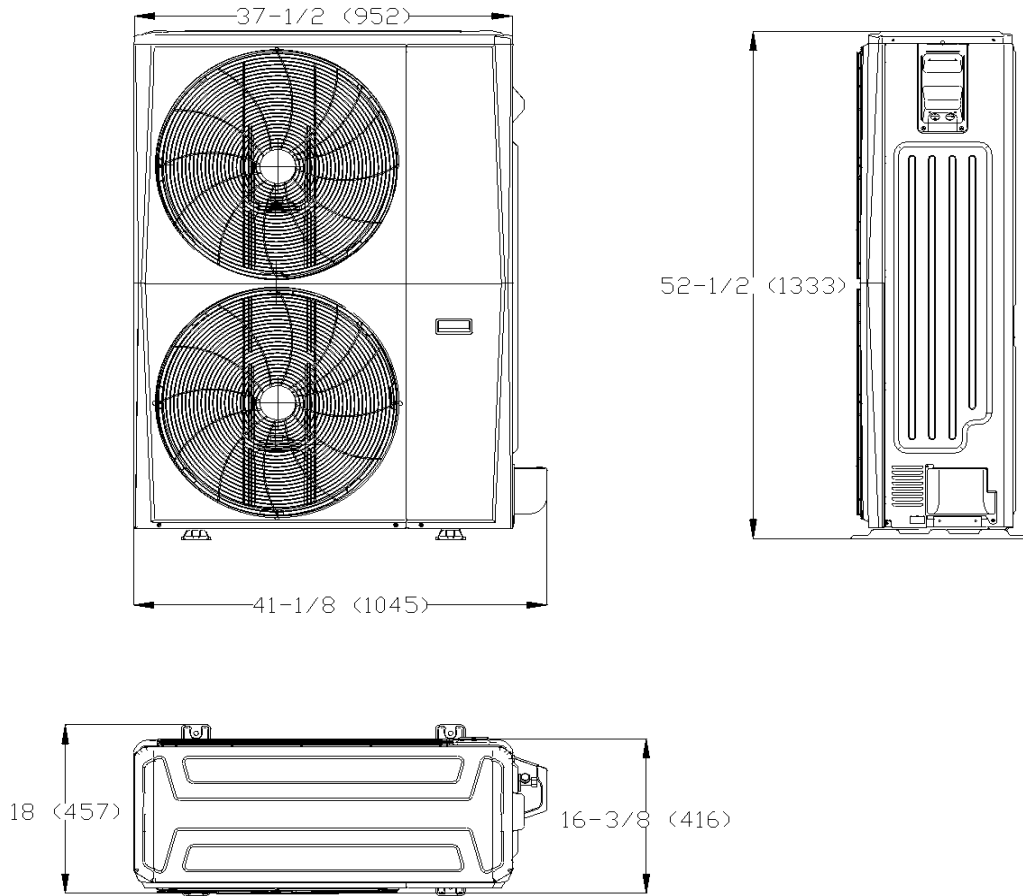


Installation Instruction For Outdoor Unit

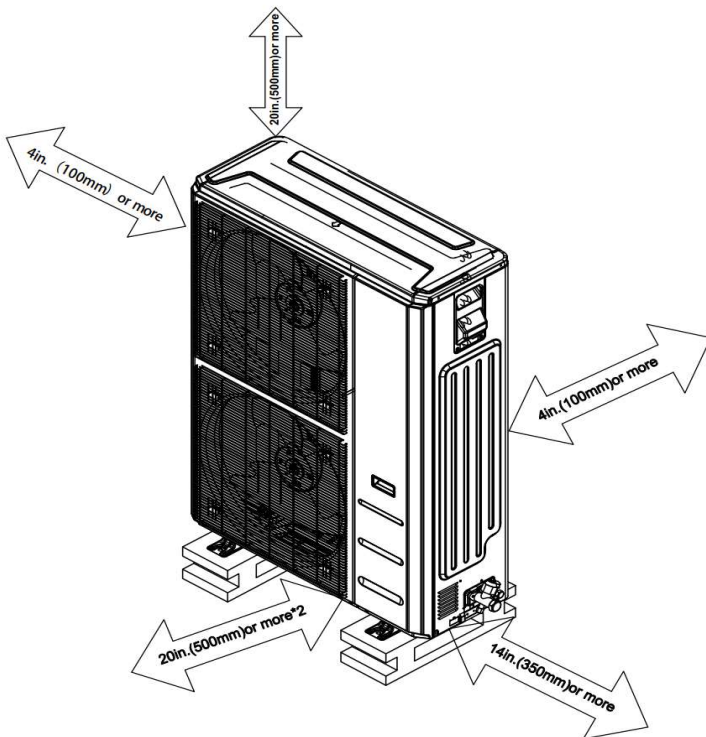

Fan Performance For Indoor Unit

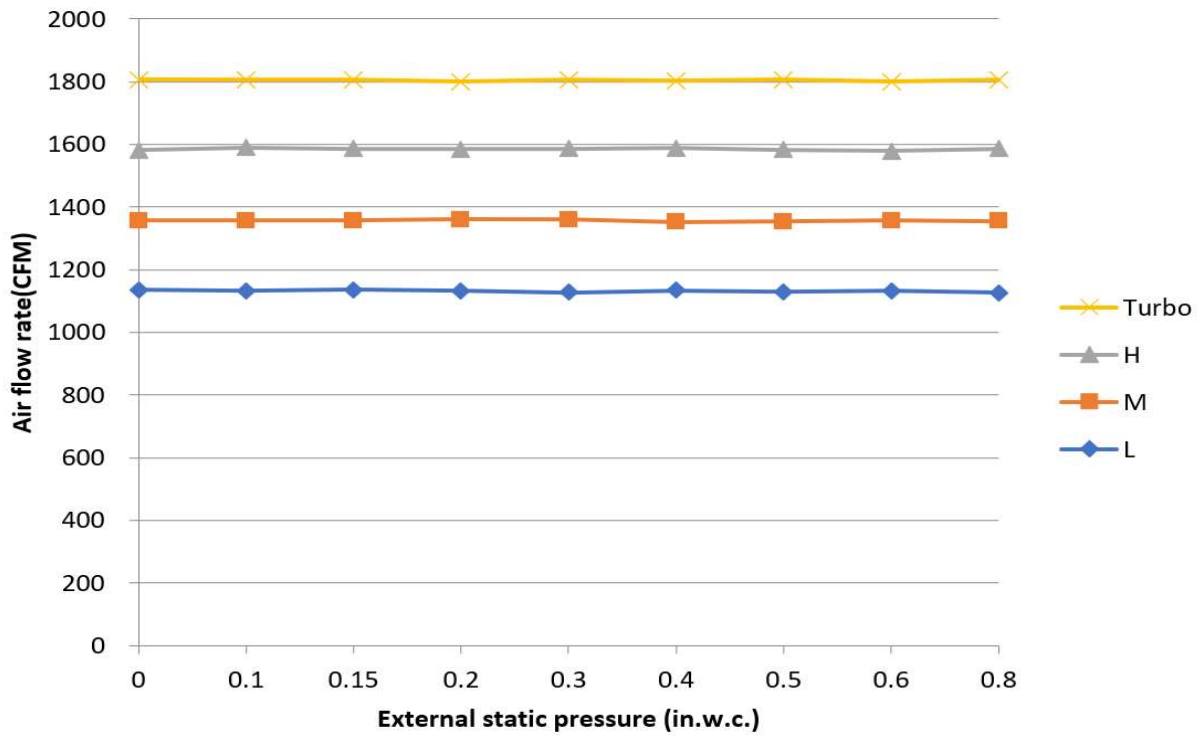

Outdoor Unit Sound Pressure Data

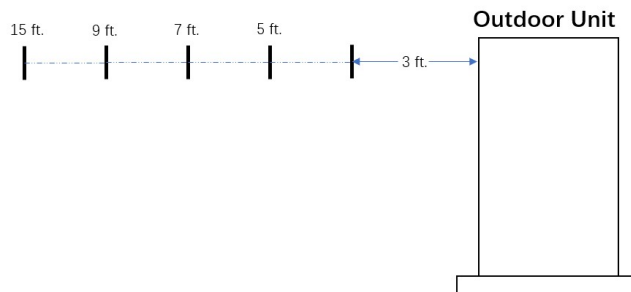

Model	Maximum Sound Pressure (dBA)				
	3'	5'	7'	9'	15'
MO1HE-H18B-2A	54.7	52.8	51.5	50.6	48.7
MO1HE-H24B-2A	55.9	54.0	52.7	51.8	49.9
MO1HE-H30B-2A	59.9	58.0	56.7	55.8	53.9
MO1HE-H36B-2A	60.2	58.3	57.0	56.1	54.2
MO1SE-H36B-2A	59.3	57.5	56.3	55.4	53.5
MO1HE-H42B-2A	60.9	59.0	57.7	56.8	54.9
MO1HE-H48B-2A	60.9	59.0	57.7	56.8	54.9
MO1SE-H48B-2A	62.1	60.2	58.9	58.0	56.1
MO1HE-H60B-2A	62.1	60.2	58.9	58.0	56.1

Features

- Multi-position installation: horizontal(left or right), vertical(up or down)
- The IDU supports 115/230V voltage compatibility
- Aluminum Coil
- Constant Air Flow system: Up to 0.8 In.W.C.
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
 - Wireless remote controller RG10 (Built-In)
 - Two-way communication programmable wired controller with built-in Wi-Fi:120N(X6W)
 - Midea Smart Thermostat
 - Third-Party 24V Thermostat
- Adaptive Control System
- 100% heating output down to -4°F*
- Standard graphene fins, a standard feature of the outdoor unit, deliver superior corrosion resistance
- The outdoor unit comes standard with chassis and crankshaft electric heating
- Built-in Refrigerant Detection Sensor

* When MAUHE-H36B-2A is paired with MO1SE-H36B-2A, its rated heating capacity at -4°F is 100%